

# 200A RENTALIZED LOAD CENTER

## Options


- Custom power output configurations
- Custom powder-coat paint designs
- Portable power cable assemblies

genErgy™



## SPECIFICATIONS

Part Number	Approx. Weight (lbs.)	Overall Dimensions (ins.)			Maximum Rating		
		Height	Depth	Width	VAC	AIC	Spacing
GENPL200	78	32.50	12.63	22	240	10K	30

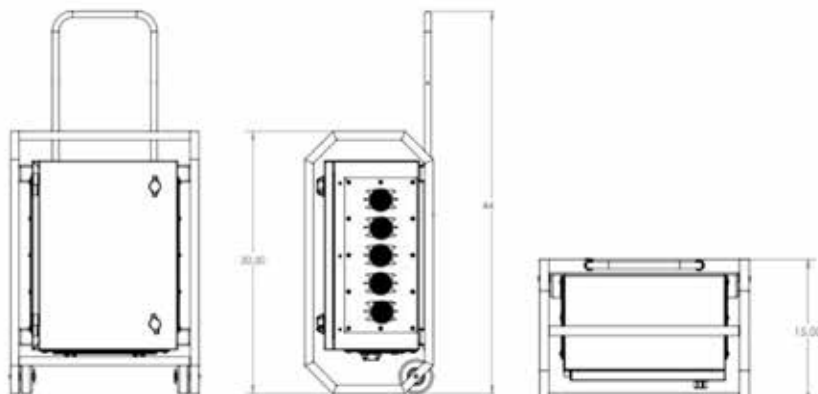

## 200A 120/208V QO Rentalized Load Center with Cam-lock Input and 30" Spacing Load Center

- Powder-coated **aluminum NEMA 3R enclosure**
- Powder-coated **heavy-duty carbon steel protective frame** with casters and telescopic handle
- Ships with a **set of male green, white, black, red and blue 16 series cam-lock inputs** with clear plastic covers
- **Square D QO OEM interior** rated for **200A 240VAC MLO** (accepts QO breakers only) **30 – one spacing MAX**
- Two large **output gland plates** (up to **ten single gang NEMA receptacles output**)
- **UL listed** portable power distribution unit
- Easy to access **trap door for hard wire in applications**
- Large polycarbonate **clear window** for viewing **phase indicator LED pilot lights** available

### GENERGY HEADQUARTERS

P.O. BOX 10731  
LANCASTER, PA 17605

### WAREHOUSES

Edmonton, AB  
Houston, TX  
Jacksonville, FL  
Lancaster, PA  
Valencia, CA

### GENERGYCABLE.COM

Phone 717.584.0375  
Fax 717.704.8445  
Toll-Free 800.308.1330

*Specifications contained herein reflect current data and are subject to change. Values are nominal and or approximate.*

**MADE IN USA**