

400A RENTALIZED LOAD CENTER

Options

- Custom power output configurations
- Custom powder-coat paint designs
- Portable power cable assemblies

genErgy™




400A 120/208V QO Rentalized Load Center with Cam-Lock Input and 30" Spacing Load Center

- Powder-coated **aluminum NEMA 3R enclosure**
- Pad lockable 1/4 turn latch
- Powder-coated **heavy-duty carbon steel protective frame** with casters
- Ships with a set of **male green, white, black, red and blue 16 series cam-lock inputs** with clear plastic covers
- **Square D QO OEM interior** rated for **400A 240VAC MLO** (accepts 30 – one spacing QO breakers max)
- Up to **10x standard NEMA receptacles output**
- **UL listed** portable power distribution unit
- Easy to access **trap door for hard wire in applications**
- 2 large output gland plates for up to **ten single gang NEMA receptacles**
- Large polycarbonate **clear window** for viewing **phase indicator LED pilot lights** available

SPECIFICATIONS

Part Number	Approx. Weight (lbs.)	Overall Dimensions (ins.)			Maximum Rating		
		Height	Depth	Width	VAC	AIC	Spacing
GENPL400	210	41.375	16	32	240	100K	30

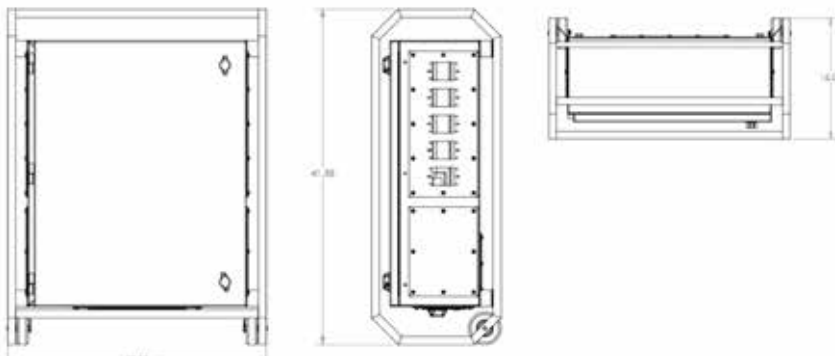

GENERGY HEADQUARTERS

P.O. BOX 10731
LANCASTER, PA 17605

WAREHOUSES

Edmonton, AB
Houston, TX
Jacksonville, FL
Lancaster, PA
Valencia, CA

GENERGYCABLE.COM

Phone 717.584.0375
Fax 717.704.8445
Toll-Free 800.308.1330

Specifications contained herein reflect current data and are subject to change. Values are nominal and or approximate.

MADE IN USA